


# 2 x 5 Grease Interceptor

100 Gallon  
Capacity

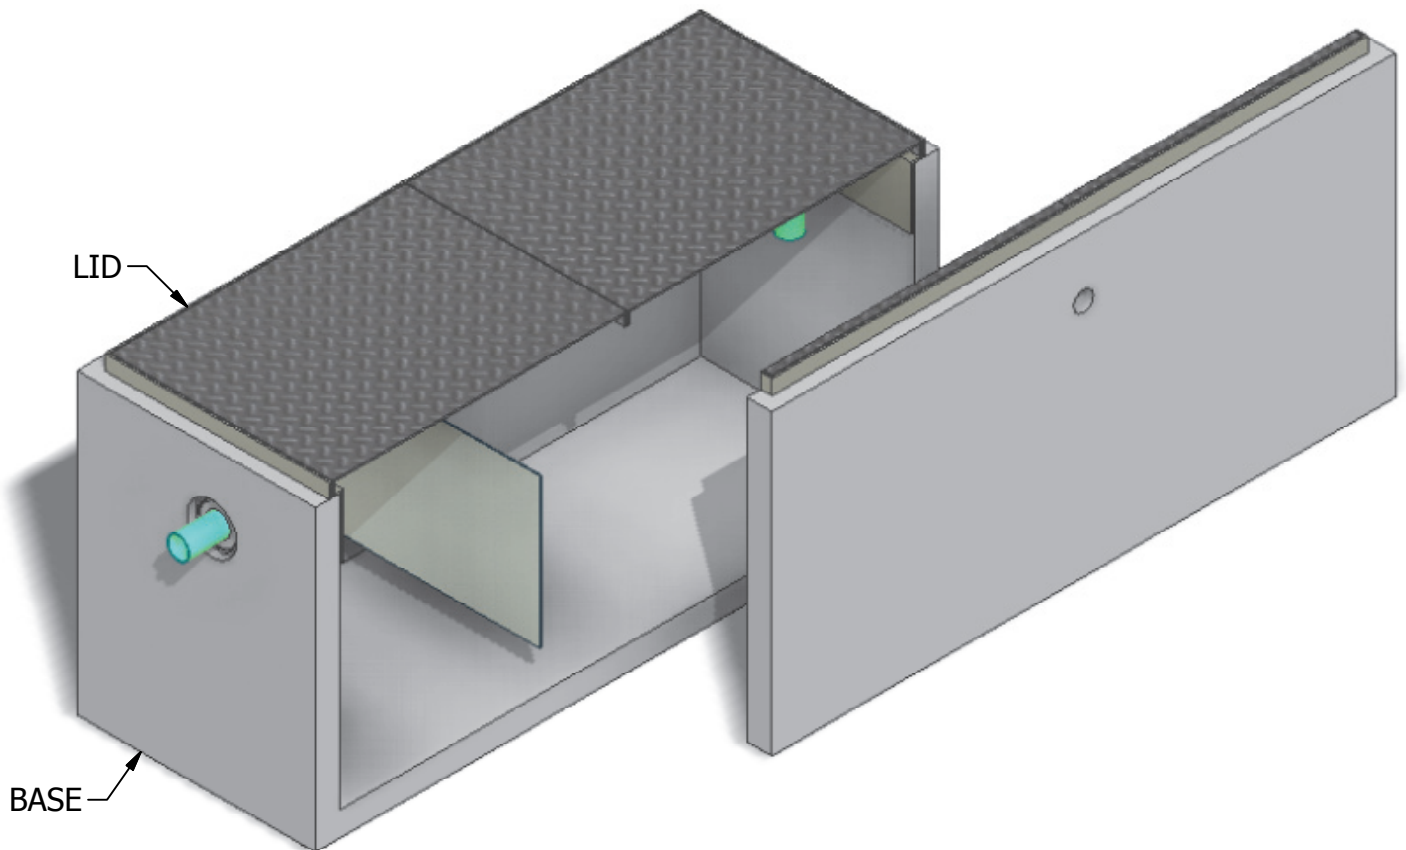

INTERIOR DIMENSIONS:  
1'-11"W x 4'-9"L x 2'-3 1/2"H

WEIGHTS:  
LID (200 lbs)  
BASE (1,532 lbs)

NOTE: Side panel has been shifted to show internal view and is not removable.


© 2013 Granite Precasting & Concrete, Inc.




4116 BAKERVIEW SPUR, BELLINGHAM, WA 98226 - (360) 671-2251 - 1-800-808-2251 - FAX: (360) 671-0780

# 2 x 5 Grease Interceptor

100 Gallon  
Capacity

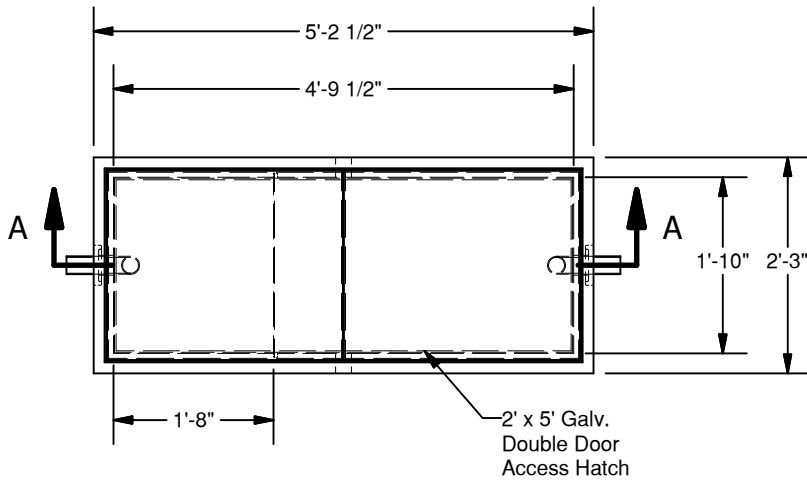

**PLAN**

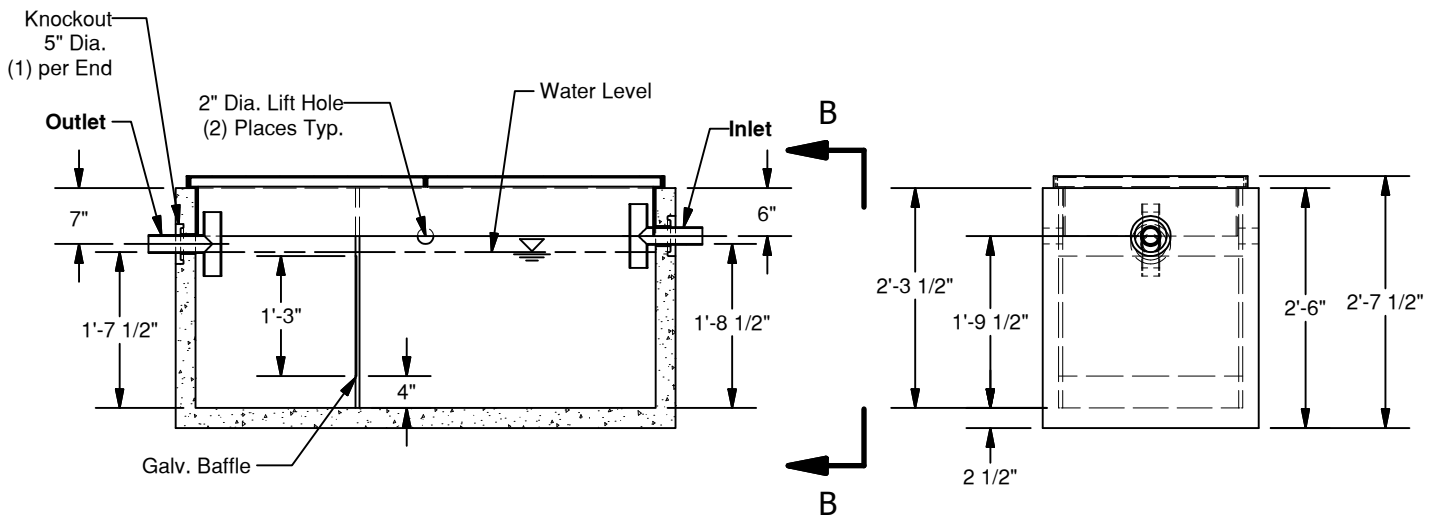

**SECTION A-A**

**VIEW B-B**

© 2013 Granite Precasting & Concrete, Inc.

**SPECIFICATIONS**

- Concrete:  $F_c=5,000$  psi @ 28 days
- Rebar: ASTM A-615 Grade 60
- Design: ASTM C-857 "Minimum Structural Design Loading for Underground Precast Concrete Utility Structures"
- Loads: AASHTO HS-20
- Backfill with granular free draining material (sand or pea gravel) free of stones or cobbles greater than 4" dia.
- All pipe to be supplied and installed by contractor.
- Contractor to field install baffle.
- Fill with clean water prior to start up.
- Items shown are subject to change without notice.