


6 x 7.5 Meter Vault

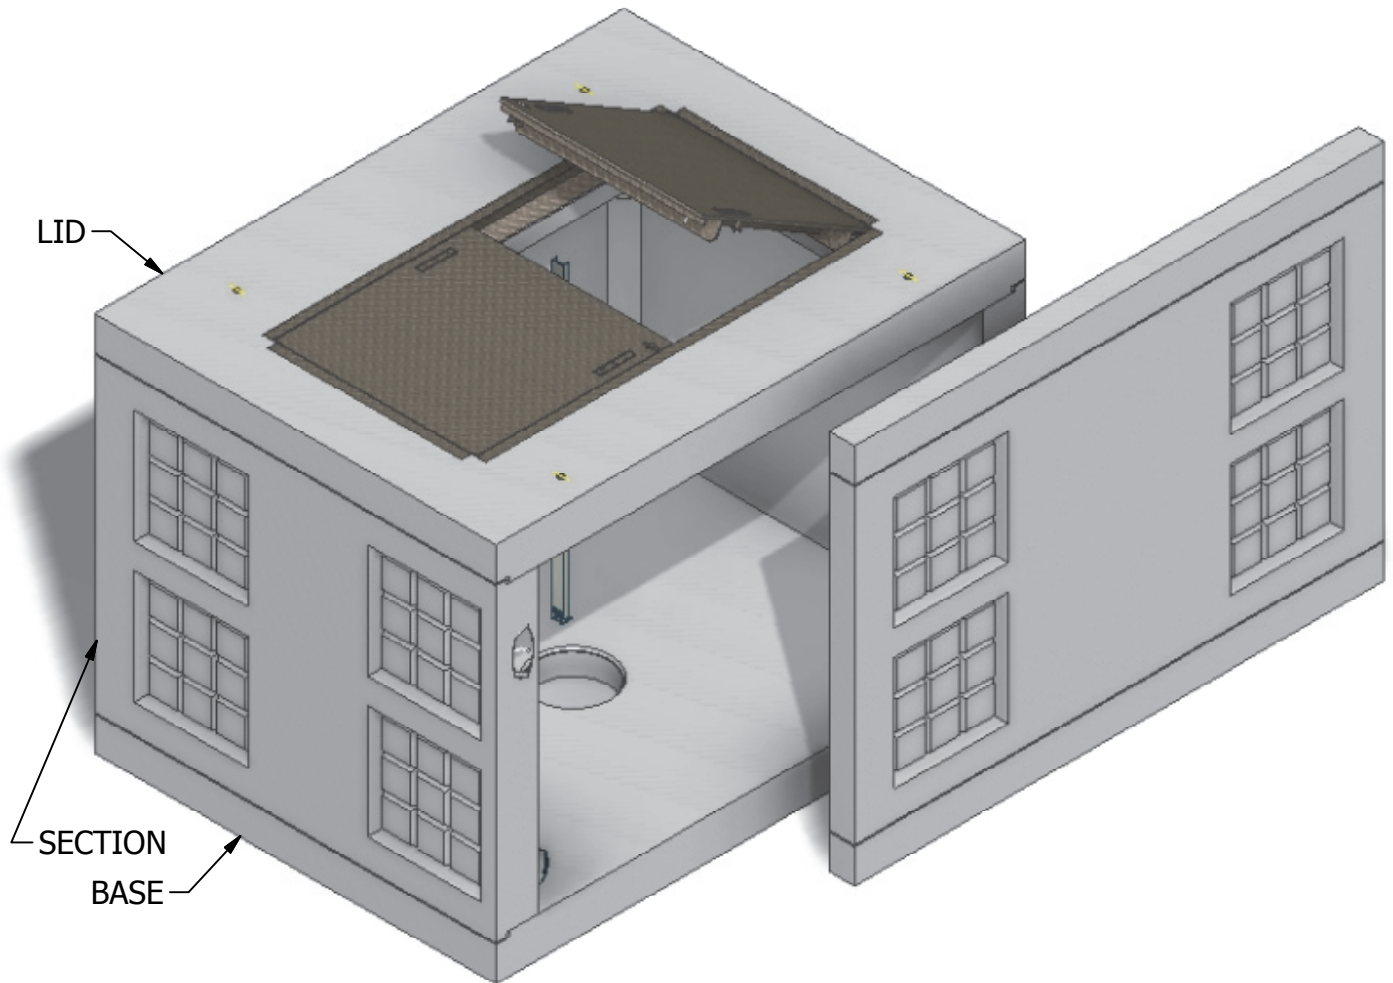

INTERIOR DIMENSIONS:
5'-6"W x 7'-0"L x 4'-5"H

WEIGHTS:
LID (3,800 lbs)
SECTION (6,320 lbs)
BASE (3,800 lbs)


NOTE: Side panel has been shifted to show internal view and is not removable.

© 2013 Granite Precasting & Concrete, Inc.





4116 BAKERVIEW SPUR, BELLINGHAM, WA 98226 - (360) 671-2251 - 1-800-808-2251 - FAX: (360) 671-0780


6 x 7.5 Meter Vault

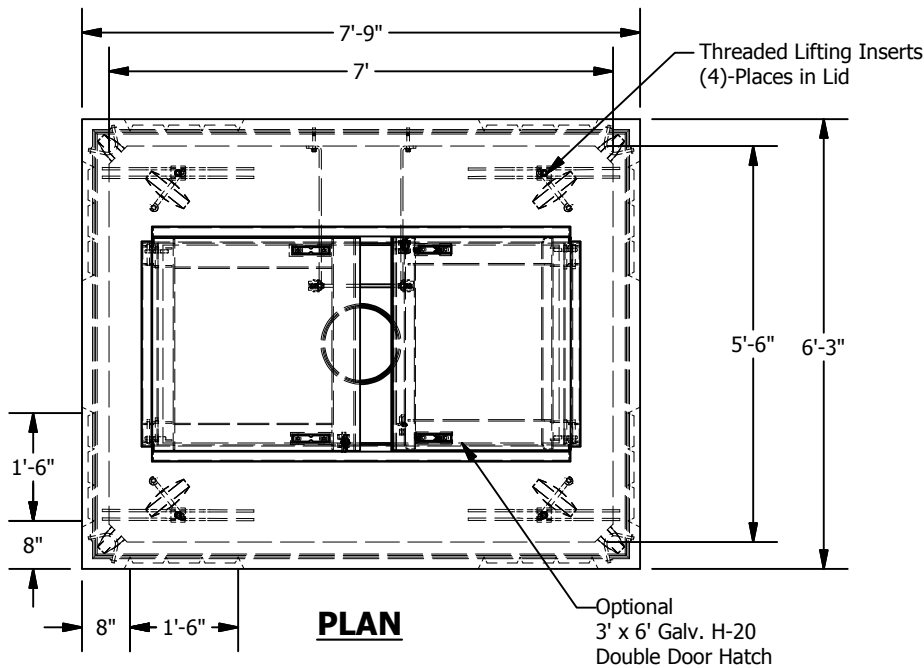


PLAN




LID OPTIONS

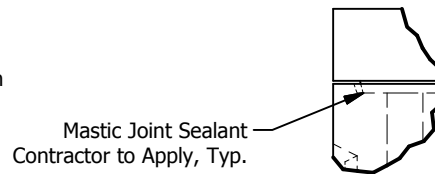

JOINT DETAIL D
SCALE 1 / 16

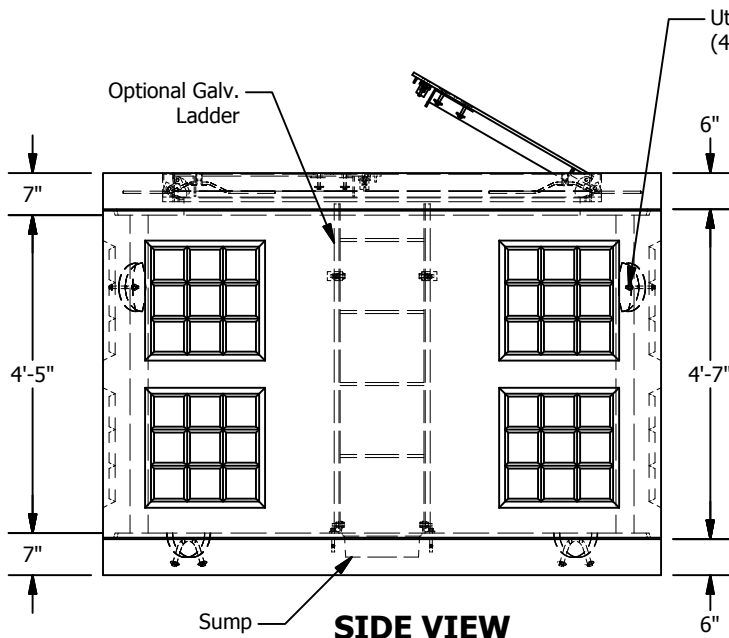

SIDE VIEW

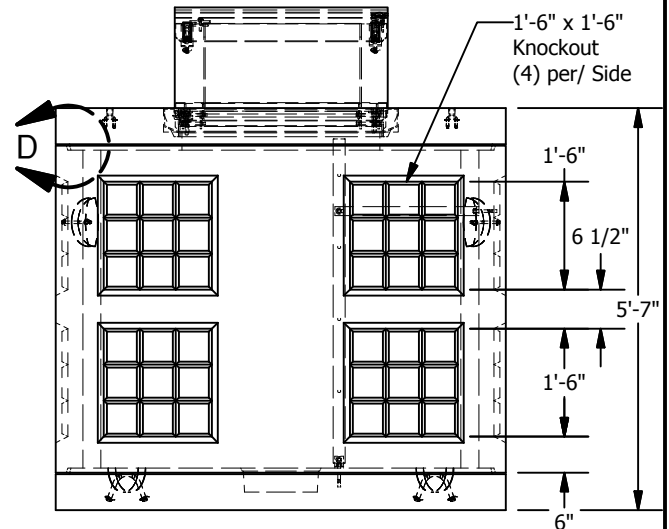

END VIEW

© 2013 Granite Precasting & Concrete, Inc.

SPECIFICATIONS

- Concrete: Fc=5,000 psi @28 days
- Rebar: ASTM A-615 Grade 60
- Design: ASTM C-857 "Minimum Structural Design Loading for Underground Precast Concrete Utility Structures"
- Loads: AASHTO HS-20
- Backfill with granular free draining material (sand or pea gravel) free of stones or cobbles greater than 4" in dia.
- Install lid prior to backfill.
- Items shown are subject to change without notice.